



ACECORE TECHNOLOGIES

ZOE X8

SPECIFICATION SHEET





Section 01

Product Description

DESCRIPTION

The Zoe is a lightweight, multipurpose Remotely Operated Aerial Vehicle for commercial use. Its compact, foldable frame, supporting eight rotors, is designed to meet the versatile demands for the creative and industrial market. Although it sports four rotors the system is still powerful enough to lift payloads up to 5.3 kg due to the low frame weight and custom designed brushless motors.



GENERAL FEATURES

Lightweight carbon fiber frame

Up to 40 minutes endurance

Redundant propulsion system

All weatherproof

Single or dual operator setup

500m/ 5KM/ 16KM range options

ADS-B ready transponder

AES256 encrypted radio link

Triple redundant autopilot



Section 02

Product Specifications

SPECIFICATIONS

WEIGHTS

Maximum gross for takeoff	11.7 kg/ 25.8 lbs
Maximum payload*	5.3 kg / 11.7 lbs
Minimum standard empty weight	5.35 kg / 11.8 lbs

DRIVE

Energy type	Electrical
Number of motors	8
Motor type	Zoe COAX10-360
Operating voltage	Up to 50V
Motor max continuous Power	2000 W
Idle speed	360 RPM/V
Number of ESCs	8
Max continuous current draw	55A

PROPELLER

Material	Carbon Fiber
Propeller setup	4 CW and 4 CCW propeller
Propeller type	18x6.5-inch fixed propeller 18x6.5-inch foldable propeller

PAYLOAD

Vibration isolation system	Quad damper system
Mounting options	Top and bottom mounting possible
Mounting system	Depending on user's preference
Battery rack	Top of centerpiece or below on quick release

*True maximum payload based on 3x 4.500mAh battery pack. With 2x 17.000mAh flight time will be longer, but maximum payload is compromised to 3.2kg.



Section 02

Product Specifications

AVIONICS

Flight controller	Cube / Auterion Skynode
Version	Orange
Operating temperatures	-40°C (-40°F) to + 85°C (185°F)

FLIGHT BATTERY

Energy type	Electrical
Battery	Lithium Polymer
Recommended make and models	Tattu 4500mAh, 10000mAh, 17000mAh,
Nominal battery voltage	22.2 V/ 6S
Minimum battery quantity	2 battery packs parallel
Maximum battery voltage	25.2V
Minimum average battery voltage	21.0V




Section 03

Flight table



FLIGHT TIMES

These flight times are representations of the typical flight time in normal conditions and are depending on several factors. The conditions in which these flight times have been tested are at 20°C ambient temperature, a nominal wind speed of 8 knots while hovering at a height of 5 meters above ground. The ZOE is put back on the ground with 10 percent battery capacity left.

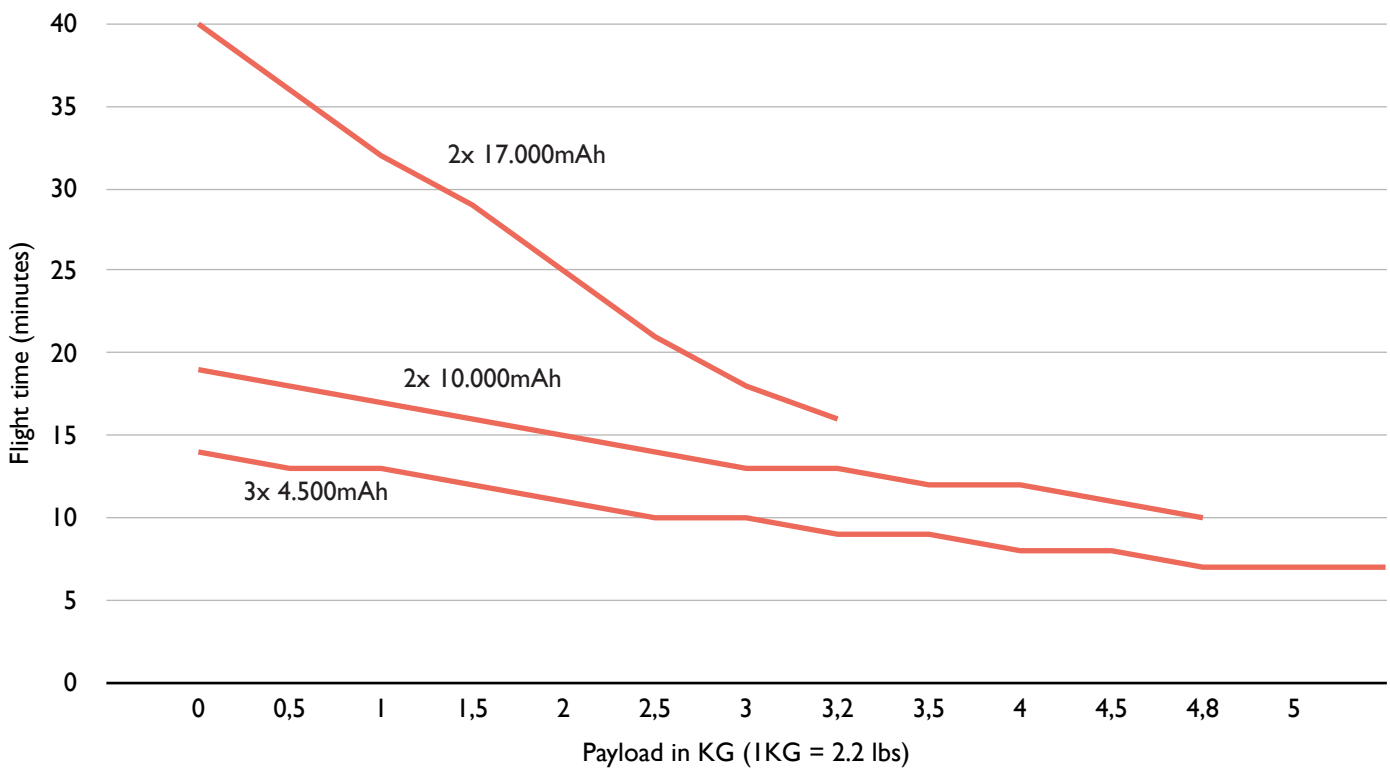

Section 04

Physical

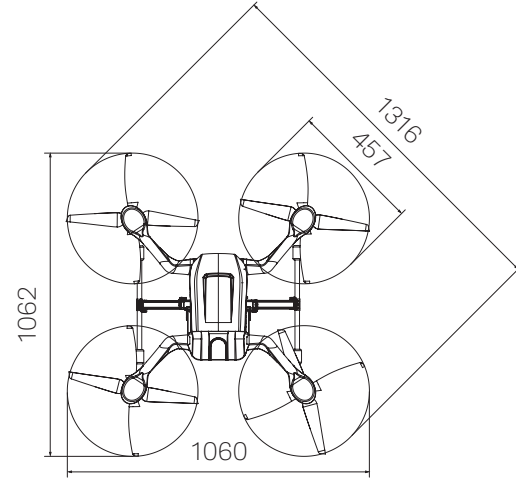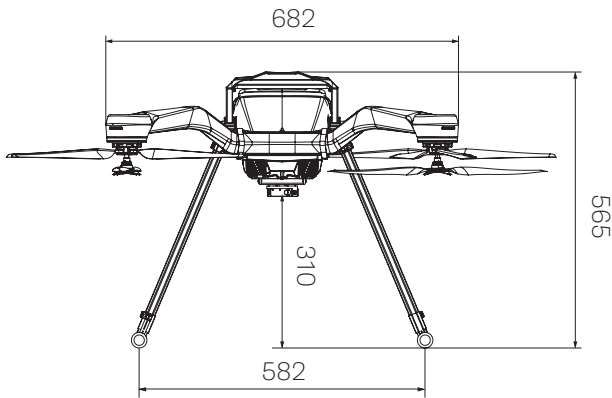

DIMENSIONS

Frame dimensions

(l x w x h) 693 x 682 x 524 mm

Rotor to rotor diagonal

970 mm

Diameter with propellers

1310 mm

Height up to payload quick release

320 mm

Ground clearance top propeller

388 mm

WEATHER LIMITATIONS

Maximum operating temperature

+50°C

Minimum operating temperature

-15°C

Maximum flight endurance

40 min

Maximum wind speed

35 knots / 18 m/s continuous

Maximum precipitation

Moderate rain conditions, although it is recommended to fly in dry conditions.

Maximum downfall

10 mm/h, 30mm/3h



Section 05

Flight limitations

FLIGHT LIMITATIONS

Maximum pitch/ roll angle	45 Degrees from horizontal
Maximum yaw rate	150 Degrees a second
Maximum flight speed	91km/h horizontal
Flight modes	GPS mode – Atti tude mode – Auto mode – Brake – Stabilize
Typical ascent	5m/s
Typical descent	4m/s
Hovering accuracy	Vertical 0.05m/ Horizontal 0.05m
RTL cruise speed	Variable from 3 m/s to 9 m/s

